




### Feature :

1. For Mini-ITX board with CPU TDP 35W max.
2. Support 1 x low profile slot for PCIe or PCI
3. 4 x DB9 ports on rear I/O
4. Adjustable heat pipe provides excellent compatibility




### Specifications:

Front Panel	<ul style="list-style-type: none"> <li>● Power switch x 1.</li> <li>● Power LED x 1.</li> <li>● HDD LED x 1.</li> <li>● USB 3.0 Port x 2.</li> </ul>
Back Panel	<ul style="list-style-type: none"> <li>● Standard I/O shield (not included).</li> <li>● Low profile expansion slot x 1.</li> <li>● DB9 port x 4.</li> </ul>
Internal Structure	<ul style="list-style-type: none"> <li>● Standard memory height.</li> <li>● 2.5" HDD x 3.</li> </ul>
Dimension ( WxDxH )	9.63 x 10.51 x 3.46 inch ( 244.5 x 267.0 x 87.8 mm )
Material	SPCC with nickel electroplating Brushed and anodized aluminum panel
Surface	Black wet paint with texture coat.

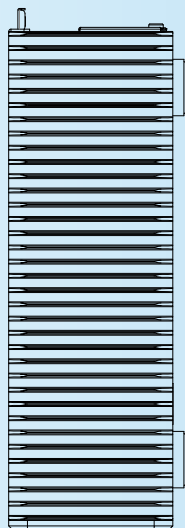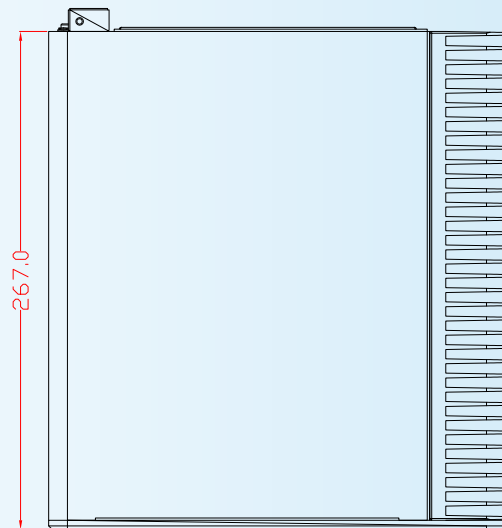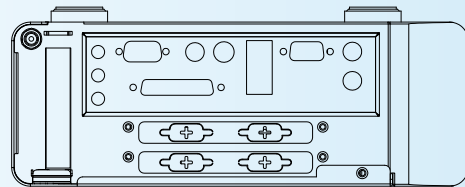

### Power Solutions :

Internal Power Supply	External AC adapter
C7(80W) DC Power board	60 or 80 Watts (12V)

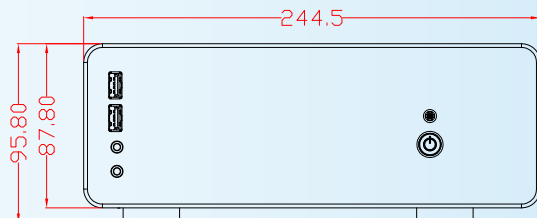

UNIT:mm