

FX fanless series



FX5408 AMD G-Serial T40E Small System

With VGA, 4S, 2Giga-LAN, 6USB, Audio and CFast/PCIe Mini-Card Socket




Features

- Fanless and low power consumption design
- AMD G-Serial T40E CPU and AMD Fusion Controller A55E
- 2 SoDIMM socket with 4GB DDR3L RAM (8GB max.)
- 2 PCIe Giga LAN
- 6 USB V2.0 Ports
- 2 In and 2 Out Isolated I/O
- Support High Definition Audio
- One Cfast Flash Card socket
- One 2.5" SATA HDD Space
- Two RS232 and two RS232/422/485 ports
- Support Expansion I/F with PCIe Mini-Card Slot

Specifications

- CPU Board:** AMD® G-Serial T40E 1.0 GHZ (512KB L2 Cache For Per Core)
Dual Core Low Power Processor with 4GB DDR3L/1066
- I/O Outlets:** 1 VGA (CRT) DB15 Connector
2 RJ45 connectors (Realtek RTL8111F PCIe Chipset)
6 USB connectors
2 RS232 and 2 RS232/422/485 connectors
3 Audio connectors (Mic-In, Line-In & Ear-Phone-Out)
1 Isolated I/O terminal block 6-pin connector
1 DC - In terminal block 2-Pin connectors
- Expansion I/F:** 1 PCIe Mini Card for Wireless/GPRS module or m-SATA
- Storage Bay:** 1 2.5" SATA HDD space
1 CFast Flash Card socket
- Power Req.:** DC 12V~24V Input, 45VA maximum (Include 6 USB Ports)
- LED Indicators:** 1 Power LED (Power Button), 1 HDD LED, 2 LAN LEDs
- Dimensions (W*D*H):** 200 x 130 x 52 mm
- Operating Temp.:** 0°C ~ 60°C (32°F ~ 140°F)
- Compliances:** CE · FCC · RoHS

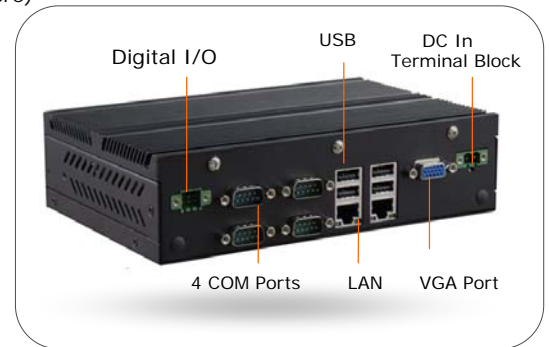

Optional Item

- FX5403K1** – Rack Mount Kit (P/N:0606010011G)
FX5504K1 – Panel VESA Mount Kit (P/N:0606010012G)
FX5407K2 – Wall Mount Kit (P/N:0606010037R)
FX5407K3 – LCD VESA Mount Kit (50*50/75*75/100*100)(P/N:0606010038R)
AK1006 - Half Size Mini PCIe Module Adapter Kit (P/N:0606010028G)

Ordering Information

Model	Description	Verified OS
FX5408	AMD T40E 1GHz Small System w/4S, VGA, , 2Giga-LAN, 6USB, D-IO, Audio & CFast /Mini-Card Socket	Windows XPe/7 and Linux



FabiaTech Corp.

TEL:886-2-22789586 FAX:886-2-22789575
 4F-3, No.18, Lane 609, Chung-Hsin Rd., Sec.5, San-Chung City, Taipei Hsien, Taiwan, R.O.C.

www.fabiatech.com