

TDM-P240WH5TAGF-RND2

24" Military P-cap Monitor, 1500nits, Rackmount,
Certificated with MIL-STD-461G, Front Side IP65,
AG, Panel Mounting Kits, 24VDC Power Input

Distribué par :



ANTEOR / DIPM
2, rue Pablo Picasso
78114 Magny-les-Hameaux
France
Tél. : +33 (0)1 61 37 07 01
E-mail : contact@anteor.com



Features

- ▶ 24" 1920*1080 FHD LCD and P-cap Touch
- ▶ IP65 and Rackmount Shape Front Bezel
- ▶ 1500 nits LED backlight
- ▶ Mosmite Film with AR feature
- ▶ Anti-Glare
- ▶ HDMI by Metal Circular Connector
- ▶ USB fo Touch by Metal Circular Connector
- ▶ DC Power Input by MS3114E8 Circular Connector
- ▶ DC 24V Power Input with 90W power adapter
- ▶ -40~70°C Operating Temperature

I/O Connect

External I/O Port	HDMI by Metal Circular Connector (with 1.5 meter external cable) USB(for Touch) by Metal Circular Connector (with 1.5 meter external cable) Power Input by MS3114E8 Connector
-------------------	---

LCD

Max. Resolution	1920 x 1080
Contrast Ratio	5000 : 1
Max. Color	16.7M
Luminance	1500 nits
View Angle	89/89/89/89

Power Requirement

Power Input	24VDC Power Input by MS3114E8 Connector
-------------	--

Touch Screen

Type	P-cap USB
------	-----------

Environment


Operating Temp	-40~70 °C , IEC-60068-2-1/2/14
Storage Temp	-40~70 °C
Humidity	10~90% @40 °C, non-condensing
EMC	MIL-STD-1275E Certification MIL-STD-461G Certification For CE101/102, RE101/102 FCC / CE Class A Certification
Vibration	MIL-STD-810H, Method 514.8, Procedure I, 5~500Hz Certification
Shock	MIL-STD-810H, Method 516.8, Procedure I, 20g 11ms Certification

Mechanical

Construction	Aluminum Bezel and Metal case
IP Rating	IP65 Front Side
Mounting	Wall Mount , VESA Mount
Dimension	TBC

Distribué par Antéor - www.anteor.com - Tél.: 01 61 37 07 00

Dimension & I/O Connector

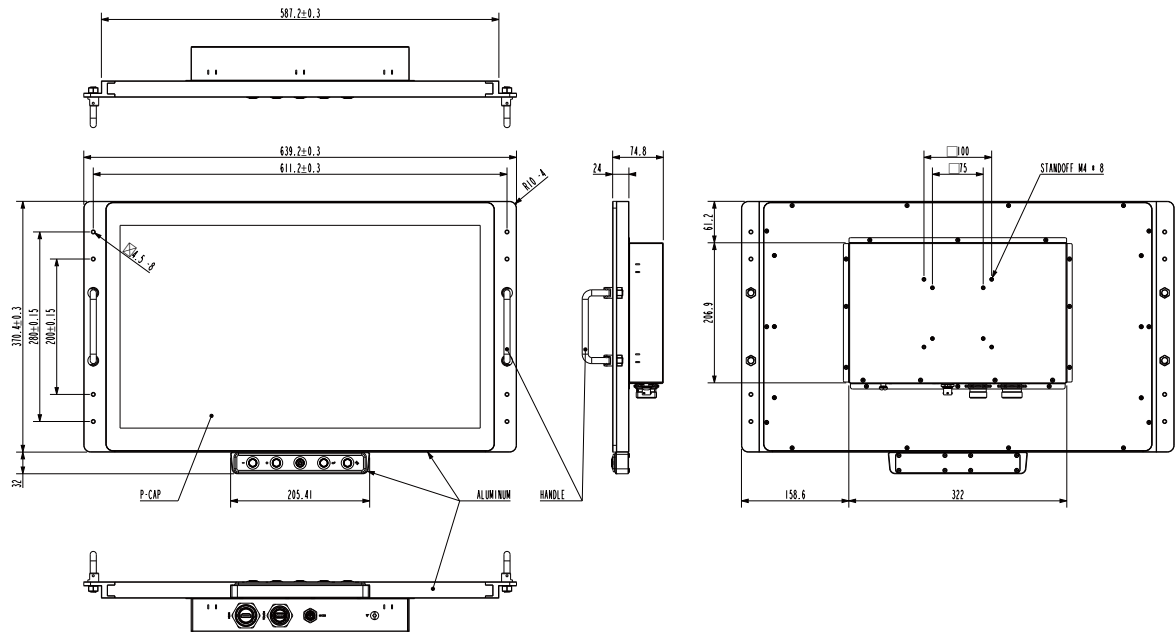

Ordering Information

TDM-P240WH5TAGF-RND2

24" Military P-cap Monitor, 1500nits, Rackmount, Certified with MIL-STD-461G, Front Side IP65, AG, Panel Mounting Kits, 24VDC Power Input