

ARES-2000 Series

Ultra Compact Fanless BOX PC w/ Intel® 14th Gen Raptor Lake U Series Processors



Distribué par :



ANTEOR / DIPM
2, rue Pablo Picasso
78114 Magny-les-Hameaux
France
Tél. : +33 (0)1 61 37 07 01
E-mail : contact@anteor.com

Features

- Intel® Core™ 5 Processor 120U
- Ultra-Compact & Fanless Design
- Supports up to 3 x USB Ports
- Supports 2 x 2.5GbE LAN Ports (up to 3 x 2.5GbE via expansion)
- Supports up to 3 x Simultaneous Displays

System

CPU	Intel® Core™ 5 Processor 120U
Memory	1 x 262-pin DDR5 SO-DIMM socket
Chipset	SoC
Graphics	Integrated Intel® Graphics
LAN Chipset	Intel® i226-LM
Watchdog Timer	1~255 levels reset
TPM	TPM 2.0 (fTPM/dTPM)

I/O

Serial Port	1 x RS232/422/485 (via RJ45 connector)
USB Port	2 x USB-A 3.2 Gen2 1 x USB-C 3.2 supports DP Alt. (4096 x 2304 @ 60 Hz) & 10W power output (5V/2A)
LAN	ARES-2000-LAN: 3 x 2.5GbE ports ARES-2000-CAN: 2 x 2.5GbE ports ARES-2000-JC1: 2 x 2.5GbE ports
Video Port	2 x HDMI 2.0 & 1 x USB-C 3.2 support DP Alt. support up to 3 x simultaneous displays
Expansion (ARES-2000-JC1 only)	1 x M.2 B-Key 2242/3042 Slot (PCIe x2, USB3.0/USB2.0) + SIM Slot for LTE, via expansion card
CANBus (ARES-2000-CAN only)	2 x 2kV isolated CAN FD via terminal block
Audio (ARES-2000-JC1 only)	1 x Audio Jack (Line-out & Mic-in)

Storage

Type	1 x M.2 M-key 2242 Slot (PCIe Gen4 x4, SATA)
------	--

Power Requirement

Power Input	DC 9~36V, DC in + Remote Switch
Power Consumption	Max. 90W

Environmental

Operating Temp.	-20 ~ 60°C (-4 ~ 140°F), ambient w/ air flow
Storage Temp.	-40 ~ 80°C (-40 ~ 176°F)
Operating Humidity	10 ~ 95% @ 60°C (non-condensing)
Vibration	MIL-STD-810H, Method 514.8, Category 4, operating
Shock & Crash	MIL-STD-810H, Method 516.8, Procedure I, functional shock=20g, operating

Qualification

Certification	CE, FCC Class A
---------------	-----------------


Mechanical

Construction	Metal + Aluminum
Mounting	Wall-mount (standard) DIN-rail (optional w/ CTOS bracket) VESA (optional w/ CTOS bracket)
Weight	1.1 kg
Dimension (W x D x H)	188 x 120 x 44 mm (7.40" x 4.72" x 1.73")

OS Support

Windows 10/ Windows11/ Ubuntu

Dimension

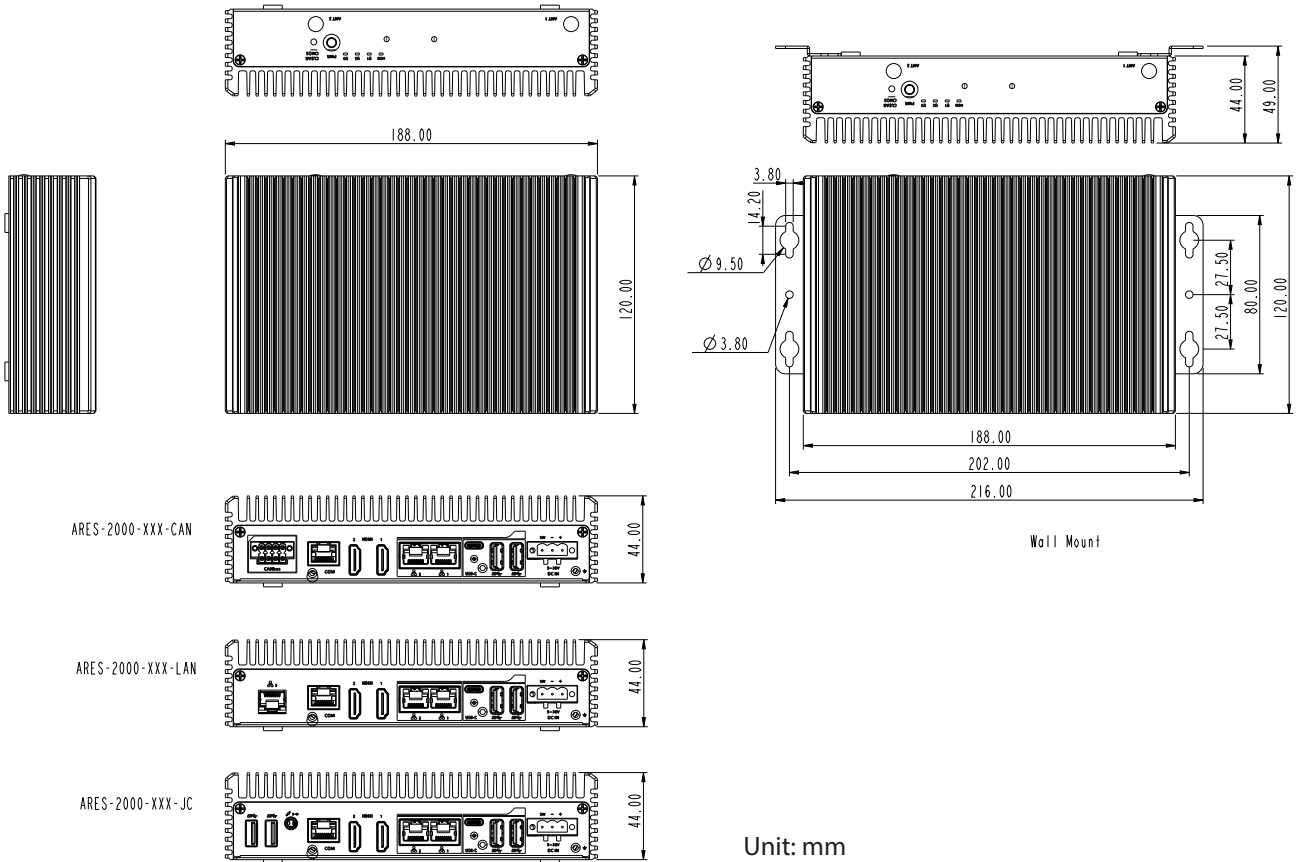

Standard Accessories

CLB-2000	Cable-Lock Bracket for ARES-2000 Series
WMK-1973	Wall Mounting Bracket Kit for ARES Series

Ordering Information

ARES-2000-LAN	ARES-2000 w/ Core 5 120U, 3 x LAN, 3 x USB, 2 x HDMI, 1 x COM, 1 x M.2 M-Key
ARES-2000-CAN	ARES-2000 w/ Core 5 120U, 2 x CANBus, 2 x LAN, 3 x USB, 2 x HDMI, 1 x COM, 1 x M.2 M-Key
ARES-2000-JC1	ARES-2000 w/ Core 5 120U, 1 x AUDIO JACK, 2 x LAN, 5 x USB, 2 x HDMI, 1 x COM, 1 x M.2 M-Key