




## NAF92-Q67

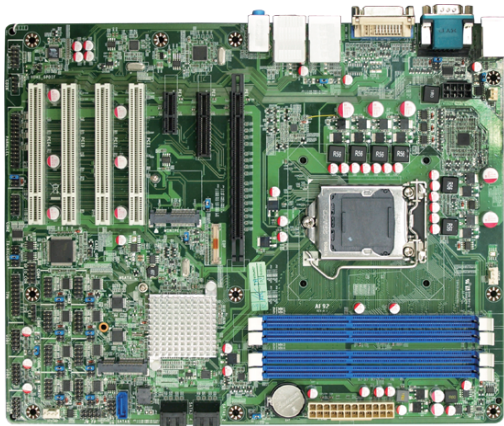

1. Intel® Q67 Express Chipset
2. Supports Intel LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
3. Support 4 \* 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
4. Intel 82579LM & 82574L Gigabit LAN
5. Intel Active Management Technology ( iAMT 7.0)
6. Support TPM 1.2 function
7. Support CPU Smart FAN
8. Supports ACPI S3 Function
9. Support Watch dog Technology
10. ATX form factor (305mm x 244mm)

### Board Specifications

■ <b>CPU</b>	■ INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor
■ <b>Chipset</b>	■ INTEL® Q67 Chipset ■ Clock 100MHz
■ <b>Memory</b>	■ 4 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
■ <b>Expansion Slots</b>	■ 1 * PCIe x 16, 4 * PCI, 1 * PCIe x 1, 1 * PCIe x 4 ■ 1 * MINI PCI-E
■ <b>Storage</b>	■ 2 * Serial ATA3 6Gb/s & 3 * Serial ATA2 3Gb/s connectors support RAID 0, 1, 5, 10 ■ 1 * mSATA socket
■ <b>Audio</b>	■ VIA VT1705 6-Channel HD Audio CODEC
■ <b>Ethernet LAN</b>	■ Intel 82579LM & 82574L PCI-E Gigabit Ethernet LAN
■ <b>USB</b>	■ Embedded 12 * USB 2.0/1.1
■ <b>Special Features</b>	■ Support ACPI S3    ■ Support Watch Dog    ■ Support CPU Smart FAN
■ <b>Rear Panel I / O</b>	■ 6 * USB 2.0/1.1 ports            ■ 1 * COM port            ■ 1 * HDMI port ■ 1 * PS2/KB Connector            ■ 1 * VGA port            ■ 3 * Audio Phone Jack ■ 2 * RJ-45 port
■ <b>Internal I / O</b>	■ 3 * USB 2.0/1.1 headers for 6 USB 2.0 ports            ■ 1 * TPM 1.2 header ■ CPU /NB / Chassis Fan connectors            ■ 1 * IR header ■ 1 * Parallel header            ■ 1 * Chassis Intrusion header ■ 1 * GPIO header            ■ 1 * AUDIO header ■ 9 * COM header ( COM2 for RS232/422/485) ■ 1 * 24-pin & 8-pin 12V ATX Power connector
■ <b>BIOS</b>	■ AMI EFI 64MB SMT Flash ROM
■ <b>Form Factor</b>	■ ATX form factor (305mm x 244mm)