



NC9KDL-2700 Mini-ITX Motherboard



NC9KDL-2700

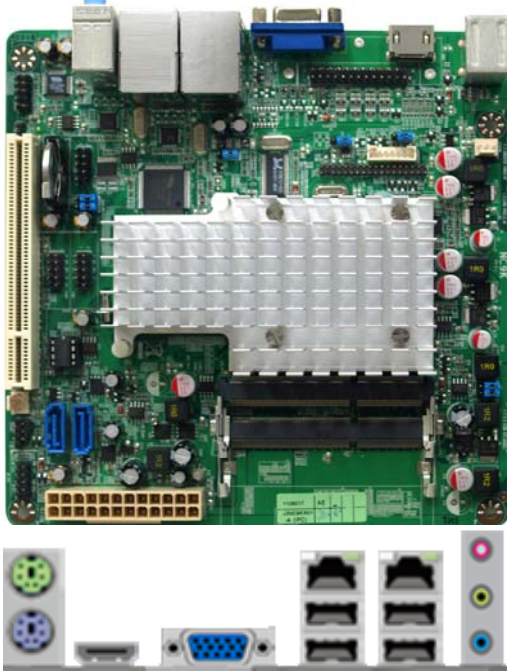

1. Next-Generation Intel Cedar Trail-D Platform
2. Intel Atom D2700 Processor, 2.13GHz, Dual-Core, 32nm, 10W
3. Intel NM10 Express Chipset
4. Integrated PowerVR SGX 545 Graphics, 640MHz
5. Supports 1080P HD Playback, Blu-ray 2.0, DirectX 9
6. Supports Dual Independent Displays
7. Supports 2 * DDR3-800/1066 SO-DIMM up to 4GB
8. Supports 2 * SATA2 3Gb/s Devices, HD Audio
9. Dual Gigabit LAN with Enhanced Surge Protection
10. HDMI/VGA and 24-bit LVDS Video Outputs
11. Watchdog Timer System Reset, 1-255 min/sec
12. Mini-ITX Form Factor (170mm x 170mm)

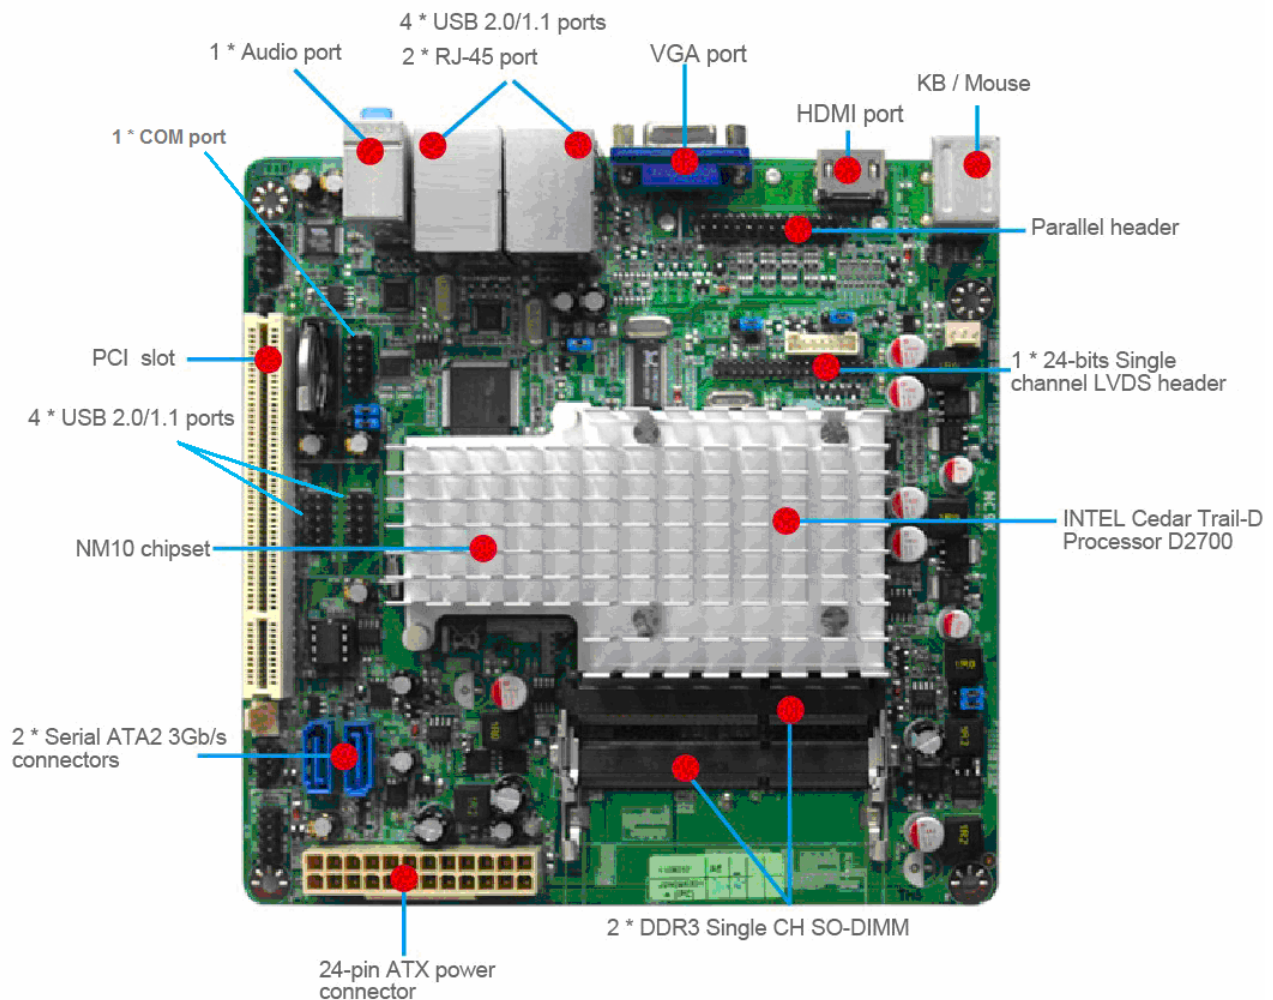



NC9KDL-2700 Specifications

■ CPU*	<ul style="list-style-type: none"> ■ Intel Atom D2700 Processor, 2.13GHz, Dual-Core, 32nm, 10W ■ Hyper-Threading Support
■ Chipset	<ul style="list-style-type: none"> ■ Intel NM10 Express Chipset
■ Video	<ul style="list-style-type: none"> ■ Integrated PowerVR SGX 545 Graphics, 640MHz
■ Memory	<ul style="list-style-type: none"> ■ 2 * 204-pin DDR3-800/1066 Single Channel SO-DIMM up to 4GB
■ Expansion Slots	<ul style="list-style-type: none"> ■ 1 * PCI Slot
■ Storage	<ul style="list-style-type: none"> ■ 2 * SATA2 3Gb/s Connectors
■ Audio	<ul style="list-style-type: none"> ■ VIA VT1705 5.1 Channel HD Audio
■ Network	<ul style="list-style-type: none"> ■ 2 * Realtek RTL8111EVL PCI-E Gigabit LAN with Enhanced Surge Protection
■ LVDS	<ul style="list-style-type: none"> ■ 1 * 24-bit Single Channel LVDS & Inverter Headers
■ USB	<ul style="list-style-type: none"> ■ 8 * USB 2.0 Ports Total
■ Other Features	<ul style="list-style-type: none"> ■ Support ACPI S3, CPU Smart FAN, Watchdog Timer 1-255 min/sec
■ Rear Panel I/O	<ul style="list-style-type: none"> ■ 4 * USB 2.0 Ports ■ 1 * PS/2 Mouse Port ■ 1 * PS/2 Keyboard Port ■ 2 * RJ-45 Ports ■ 3 * Audio Ports (Line-in, MIC, Line-out) ■ 1 * VGA Port ■ 1 * HDMI Port
■ Internal I/O	<ul style="list-style-type: none"> ■ 2 * USB Headers for 4 * USB 2.0 Ports ■ 2 * Fan Headers ■ 1 * 24-pin ATX Power Connector ■ 1 * LVDS & Inverter Headers ■ 1 * Audio Header ■ 1 * Serial Header (RS232) ■ 1 * Parallel Header ■ Front Panel Headers
■ BIOS	<ul style="list-style-type: none"> ■ AMI 16MB DIP Flash ROM
■ Box Contents	<ul style="list-style-type: none"> ■ NC9K Motherboard, SATA Cable, Serial Cable, Manual, DVD Driver Disk, I/O Shield
■ Compliance	<ul style="list-style-type: none"> ■ CE, FCC, RoHS, ErP
■ Temperature	<ul style="list-style-type: none"> ■ Operating Temp 0~40° C ■ Storage Temp -20-85° C
■ Form Factor	<ul style="list-style-type: none"> ■ Mini-ITX Form Factor (170mm x 170mm)
■ Warranty	<ul style="list-style-type: none"> ■ 2 Years Limited Warranty

*This board is designed to be installed in a chassis with at least one exhaust fan.

**Specifications subject to change without notice, not responsible for typographical errors.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
38507 Cherry St., Suite E, Newark, CA 94560
www.jetwaycomputer.com

