
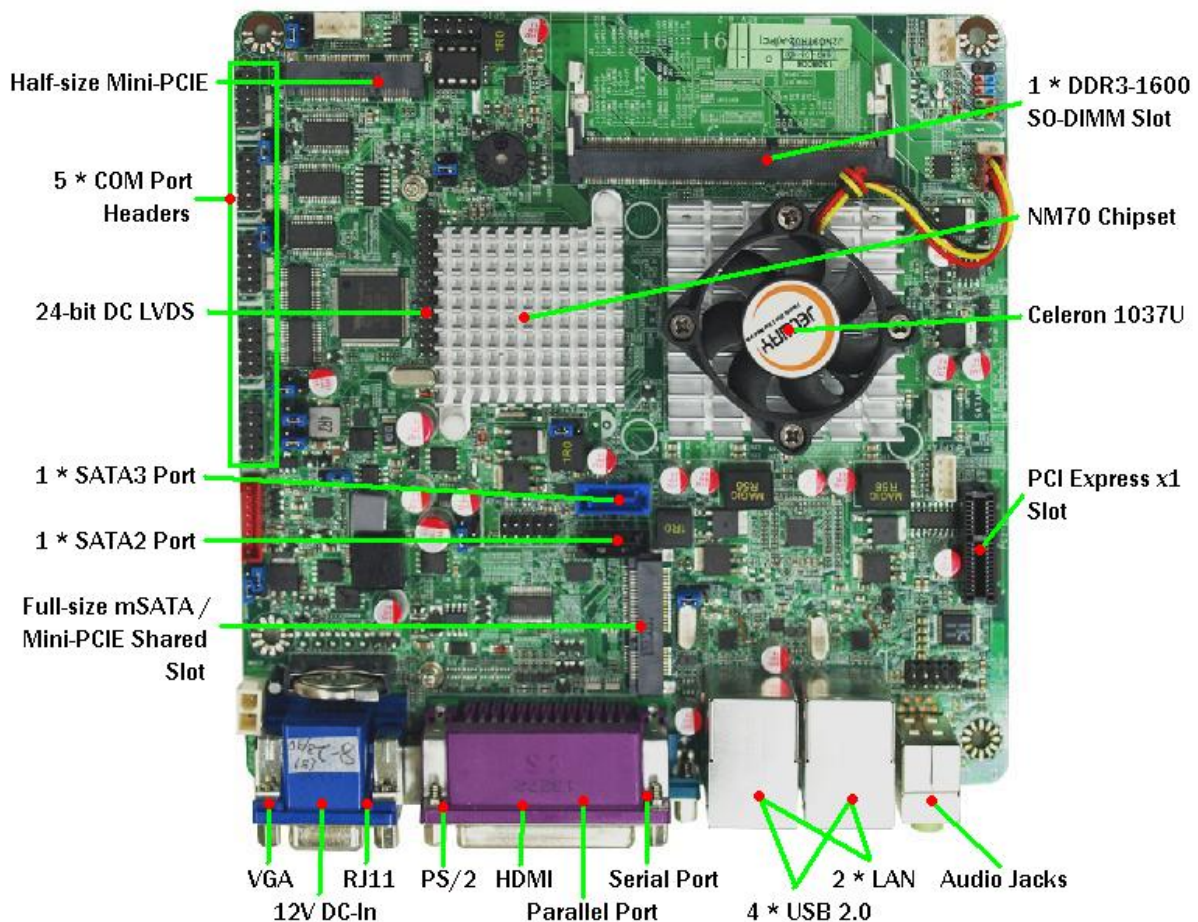
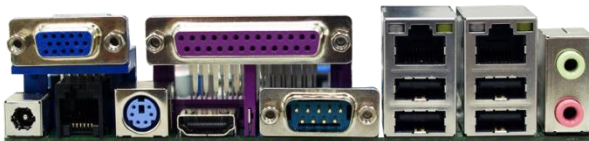


NC9T-1037

Mini-ITX Industrial Motherboard for Point of Sale Celeron 1037U / COM / LPT / RJ-11 / 2 LAN

Features

1. Industrial Motherboard Designed for Point of Sale (POS) Systems with Planned Lifecycle Through Q4'2016
2. Intel Celeron 1037U Dual-core Processor, 1.8GHz, Ivy Bridge Class, 22nm, 17W, , Intel NM70 Chipset
3. Supports DDR3-1600 SODIMM up to 8GB Total
4. HDMI, VGA and 24-bit Dual Channel LVDS Ports
5. Intel HD Graphics Supporting up to 2 Displays
6. 1 * SATA3 6Gb/s port, 1 * SATA2 3Gb/s port
7. 1 * Full-size mSATA/mini-PCIE Shared Slot
8. 1 * PCI Express x1 Slot, 1 * Half-size Mini-PCIE Slot
9. Parallel Port, Serial Ports, PS/2 Keyboard/Mouse Port
10. RJ11 Jack with +12V/+24V Power for Cash Drawers
11. Dual Gigabit LAN, 2-CH Audio, Watchdog Timer
12. Built-in +12V DC or Internal 2-pin +12V Power Connector
13. Compatible with Win XP, Win 7, Win 8, Linux
14. Mini-ITX Form Factor (170mm x 170mm)

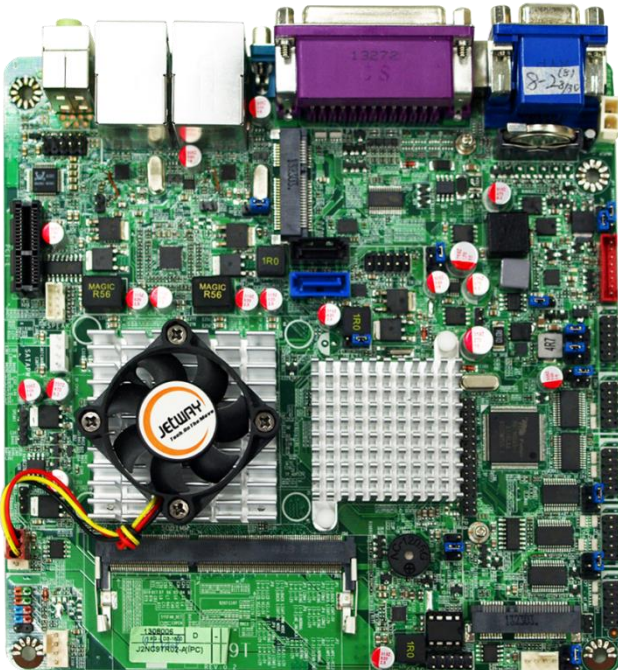

Model / Series	■ NC9T
Part No	■ JNC9T-1037
Processor	■ Intel Celeron 1037U Dual-core Processor, 1.8GHz, Ivy Bridge Class, 22nm, 17W
Chipset	■ Intel NM70 Chipset
Video	■ Intel HD Graphics in processor, up to 2 displays
Memory	■ 1 * 204-pin SO-DIMM slot supporting DDR3-1600/1333 up to 8GB total
Expansion Slots	■ 1 * PCI Express x1 slot ■ 1 * Half-size Mini-PCI Express card slot
Storage	■ 1 * SATA3 6Gb/s port, 1 * SATA2 3Gb/s port ■ 1 * Full-size mSATA/mini-PCI Express shared slot
Audio	■ Realtek ALC662 2 Channel HD Audio
Network	■ 2 * Realtek RTL8111G Gigabit LAN
Other Features	■ ACPI S3, AHCI, CPU Smart FAN, Watchdog Timer 10-255 min/sec, AT/ATX Power mode
Rear Panel I/O	■ 4 * USB 2.0 Ports ■ 2 * RJ-45 Ports ■ 1 * Serial Ports (RS232/422/485, +5V/+12V), Parallel port ■ 1 * HDMI, 1 * VGA, 1 * PS/2 Keyboard/Mouse port ■ 1 * RJ-11 port (+12V/+24V) ■ 2 * Audio Jacks (Line Out, Mic In) ■ +12V DC-In jack
Internal I/O	■ 1 * USB Headers for 2 * USB 2.0 Ports ■ 5 * Serial Port Headers (RS232, +5V/+12V) ■ 24-bit Dual channel LVDS connector & Inverter ■ Chassis Intrusion Header ■ 2-pin +12V Alternate Power connector
BIOS	■ AMI UEFI 32MB DIP Flash ROM
Box Contents	■ NC9T Motherboard, SATA Cables, Manual, DVD Driver Disk, I/O Shield
Certification	■ CE, FCC, RoHS, ErP
Temperature	■ Operating Temperature 0~40 ° C, Storage Temperature -20-85 ° C
Form Factor	■ Mini-ITX Form Factor (170mm x 170mm)
Warranty	■ 2 Years Limited Warranty

*Specifications subject to change without notice, not responsible for typographical errors.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
8058 Central Ave., Newark, CA 94560
www.jetwaycomputer.com

