




NF36-2600 NF36-2800

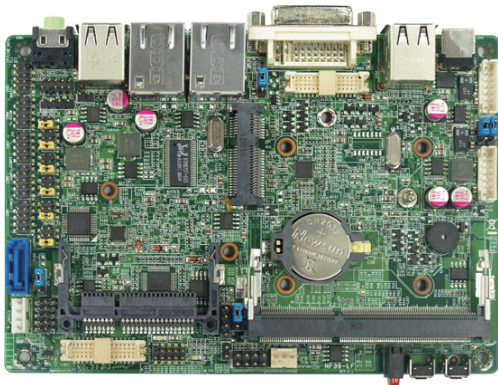

1. INTEL® Cedar Trail-M Processor N2600 / N2800 + NM10 Chipset
Support 1 * DDR3 800 Single CH up to 2GB
2. Support 1 * Serial ATAll (3Gb/s) Devices
3. Realtek ALC662 HD Audio CODEC with 4-CH
4. 1 * 24 bits Single & 1 * 24 bits
Dual Channel LVDS header
5. Support DVI-I Output
6. Supports 2 * Realtek RT8111EVL Gigabit LAN
7. 148 x 102mm 3.5" SBC Form Factor

Board Specifications

■ CPU	<ul style="list-style-type: none"> ■ INTEL® Cedar Trail-M Processor N2600 (1.6GHz) ■ INTEL® Cedar Trail-M Processor N2800 (1.86GHz)
■ Chipset	■ INTEL®NM10 Express chipset
■ Memory	■ 1 * DDR3 800/1066MHz Single CH SO-DIMM up to 2GB
■ Expansion Slots	■ 1 * MINI PCI-E
■ Storage	<ul style="list-style-type: none"> ■ 1 * Serial ATAll 3Gb/s connectors ■ 1 * CFast card socket
■ Audio	■ Realtek ALC662 HD Audio CODEC with 4-CH
■ Ethernet LAN	■ 2 * Realtek RTL8111EVL Gigabit LAN
■ USB	■ Embedded 7 * USB 2.0/1.1
■ LVDS	■ Onboard 1 * 24-bits Dual channel & 1 * 24-bits Single LVDS connectors
■ Rear Panel I / O	<ul style="list-style-type: none"> ■ 4 * USB 2.0/1.1 ports ■ 1 * DVI-I port ■ 2 * RJ-45 ports ■ 1 * 12V DC-IN JACK ■ Line-out port
■ Internal I / O	<ul style="list-style-type: none"> ■ 2 * USB 2.0 header for 3 * USB 2.0 ports ■ 1 * Audio header ■ System/Chassis/NB Fan Connectors ■ 4 * COM header(COM1~3 for RS232, COM4 for RS232/422/485) ■ 1 * GPIO header ■ 1 * CFast card reader socket ■ DIY switch x2 (reset & power button)
■ BIOS	■ AMI 16MB SMT Flash ROM
■ Form Factor	■ 3.5" SBC form factor (148mmx102mm)