

# Nuvo-5026E Series

Intel® 6th Gen Core™ i7/ i5/ i3 Fanless Controller with Dual PCIe Slot Expansion Cassette, 6x GbE and MeziO™ Interface



CE FC

## Key Features

- Intel® 6th Gen Core™ i7/ i5/ i3 LGA1151 35W/ 65W
- Dual PCIe x8 slots in patented expansion Cassette\*
- MeziO™ interface for easy function expansion
- Rugged, -25°C to 70°C fanless operation
- 6x GbE ports, supporting 9.5 KB jumbo frame
- Up to 32 GB, DDR4-2133 SODIMM
- Accommodates two 2.5" SATA HDD/ SSD with RAID 0/1 support
- VGA/ DVI/ DP triple independent display, supporting 4K2K resolution

\*R.O.C Patent No. M456527

## Introduction

Nuvo-5026E is the latest Nuvo-5000 family member with dual PCIe slots. The dual PCIe slots enhance expansion abilities while preserving all practical features such as ruggedness, performance and versatility. The expandability makes Nuvo-5026E more adaptable to various application needs while the two PCIe slots in the patented expansion Cassette are easy to access for PCIe card installation without the need to disassemble the system.

Nuvo-5026E supports LGA1151 6th Gen Core™ processors. It offers processor selection flexibility from Core™ i7 to Celeron according to performance needs and operating environment. It also offers plenty of I/O functions such as 6x GbE, 4x USB3.0, 3x COM ports and triple independent display. In addition, Neousys' MeziO™ interface can also further expand system I/Os offering up to either 11x COM ports, 10x GbE, 8x USB3.0, 32x DIO or ignition power control by installing an optional MeziO™ module.

Nuvo-5026E is an expandable and flexible platform with numerous I/O functions for various industrial applications.


## Specifications

System Core		Expansion Bus		
Processor	Intel® Core™ i7-6700 (8M Cache, 3.4/ 4.0 GHz, 65W TDP)*	PCI/PCI Express	2x PCIe x8 slot @ Gen3, 4-lanes PCIe signals in expansion Cassette	
	Intel® Core™ i5-6500 (6M Cache, 3.2/ 3.6 GHz, 65W TDP)*	Mini PCI-E	1x internal mini PCI Express socket with front-accessible SIM socket 1x internal mini PCI Express socket with internal SIM socket (mux with mSATA)	
	Intel® Core™ i3-6100 (3M Cache, 3.7 GHz, 51W TDP)*	Expandable I/O	1x MeziO™ expansion port for Neousys' MeziO™ modules	
	Intel® Pentium® G4400 (3M Cache, 3.3 GHz, 54W TDP)*	Power Supply	DC Input	1x 3-pin pluggable terminal block for 8~35VDC DC input
	Intel® Celeron® G3900 (2M Cache, 2.8 GHz, 51W TDP)*	Remote Ctrl. & Status Output	1x 10-pin (2x5) wafer connector for remote on/off control and status LED output	
	Intel® Core™ i7-6700TE (8M Cache, 2.4/ 3.4 GHz, 35W TDP)	Mechanical	Dimension	240 mm (W) x 225 mm (D) x 111 mm (H)
	Intel® Core™ i5-6500TE (6M Cache, 2.3/ 3.3 GHz, 35W TDP)	Weight	3.7 kg (incl. CPU, GPU, memory and HDD)	
	Intel® Core™ i3-6100TE (4M Cache, 2.7 GHz, 35W TDP)	Mounting	Wall-mount by mounting bracket (standard) or DIN-Rail mounting (optional)	
	Intel® Pentium® G4400TE (3M Cache, 2.4 GHz, 35W TDP)	Environmental	with i7-6700TE, i5-6500TE, i3-6100TE, Pentium G4400TE (35W TDP) -25°C ~ 75°C **	
	Intel® Celeron® G3900TE (2M Cache, 2.3 GHz, 35W TDP)	Operating Temperature	with i7-6700, i5-6500, i3-6100 (65W/51W TDP) -25°C ~ 70°C */ ** (configured as 35W CPU mode) -25°C ~ 50°C */ ** (configured as 65W/51W CPU mode)	
Chipset	Intel® Q170 platform controller hub	Storage Temperature	-40°C ~ 85°C	
Graphics	Integrated Intel® HD graphics 530 or 510 (CPU dependent)	Humidity	10%~90%, non-condensing	
Memory	Up to 32 GB DDR4-2133 SDRAM by two SODIMM sockets	Vibration	Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)	
AMT	Supports AMT 11.0	Shock	Operating, 50 Grms, Half-sine 11 ms Duration (w/ SSD, according to IEC60068-2-27)	
TPM	Supports TPM 2.0	EMC	CE/ FCC Class A, according to EN55022, EN55024 & EN55032	
I/O Interface				
Ethernet	6x Gigabit Ethernet ports by Intel® I219 and 5x I210			
PoE+	Optional IEEE 802.3at PoE+ PSE for GbE Port 3 ~ Port 6, 80 W total power budget			
USB	4x USB 3.0 ports via native xHCI controller 4x USB 2.0 ports			
Video Port	1x stacked VGA + DVI-D connector 2x DisplayPort connectors, supporting 4K2K resolution			
Serial Port	2x software-programmable RS-232/ 422/ 485 port (COM1 & COM3) 1x RS-232 port (COM2)			
Audio	1x Mic-in and 1x Speaker-out			
Storage Interface				
SATA HDD	2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1			
mSATA	1x full-size mSATA port (mux with mini-PCIe)			


\* For i7-6700 running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature.

\*\* For sub-zero operating temperature, a wide temperature HDD drive or Solid State Disk (SSD) is required.

## Appearance

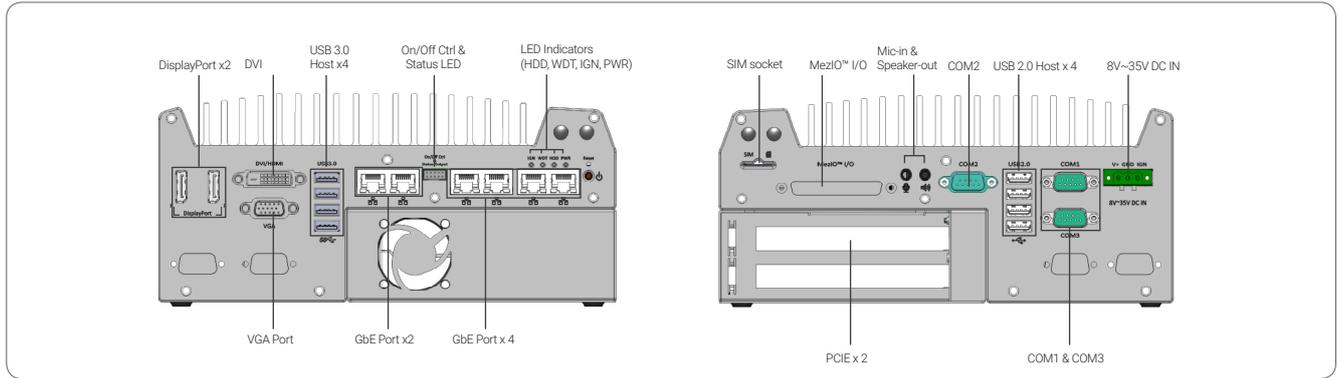

## Dimensions

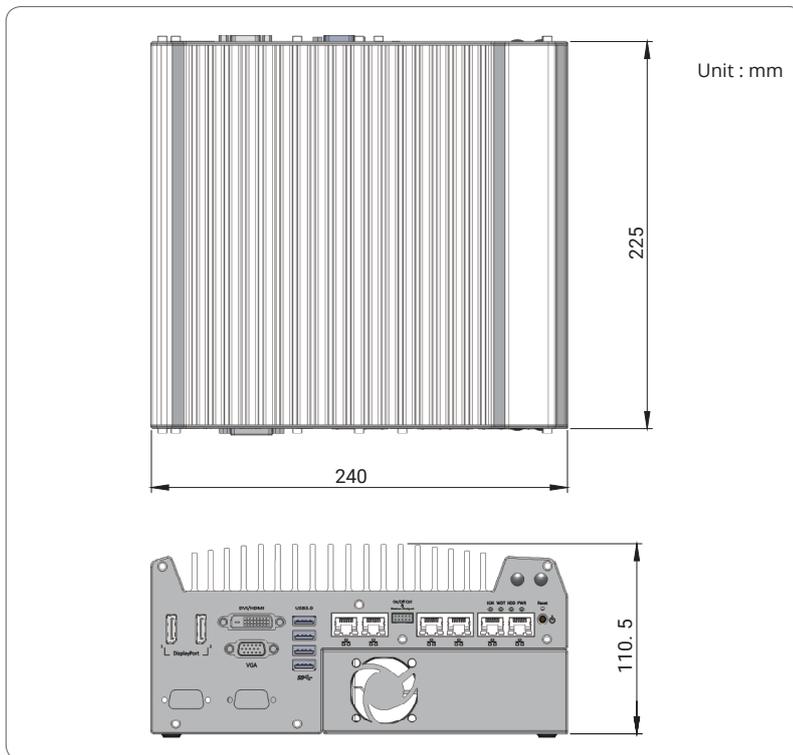

▲ Nuvo-5026E



▲ Dual PCIe Cassette

## Ordering Information

Model No.	Product Description
Nuvo-5026E	Intel® 6th-Gen Core™ fanless controller with dual PCIe Cassette, 6x GbE and MeziO™
	Optional 802.3at PoE+ for GbE port 3 ~ port 6

## Optional Accessories

20V, 160W AC/ DC power adapter  
 DIN-Rail mounting kit

### MeziO™ Modules

MeziO™-C180	MeziO™ module with 4x RS-232/422/485 ports and 4x RS-232 ports
MeziO™-C181	MeziO™ module with 4x RS-232/422/485 ports and 4x RS-422/485 ports
MeziO™-D220	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output
MeziO™-D230	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output
MeziO™-V20-EP	MeziO™ module with ignition power control function for in-vehicle usage
MeziO™-G4P	MeziO™ module with 4x Gigabit 802.3at PoE+ ports
MeziO™-G4	MeziO™ module with 4x Gigabit Ethernet ports
MeziO™-U4	MeziO™ module with 4x USB 3.0